


# Straightliner Plus


## Instructions for Use

### PREPARING SURFACE GUIDELINES...



#### FOR STRAIGHT LINES...

- Mark the CENTER of the lines to be masked with chalk line. (Snap line)

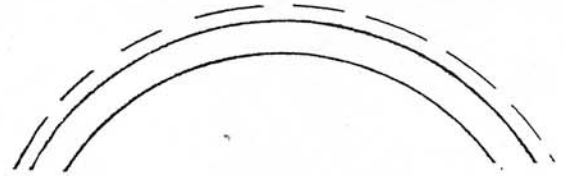


#### FOR CURVES AND CIRCLES...

- Mark a guide for the StraightLiner Plus with string and chalk. ADD 1-3/4 INCHES TO THE RADIUS OF THE NEEDED CIRCLE/CURVE (3-1/2 inches to it's diameter). This chalk line will be used as a guide for the OUTER WHEELS of the StraightLiner Plus, NOT the center of the lines to be masked.

### LOADING THE STRAIGHTLINER- PLUS...


- 1) Determine the width of line to be masked. The StraightLiner Plus will mask lines 1-1/2, 2, 2-1/2, or 3 inches wide.

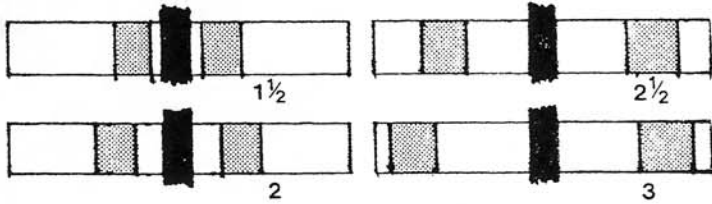

- 2) Loosen the nylon wing-nuts of the tape guides. Adjust the tape guides so that the needed notches face up and forward. Tighten nylon wing-nuts.


- 3) Pull one foot of tape from spool. Load the StraightLiner Plus with two (2) 1" masking tape spools, with adhesive side of tape up.

- 4) Thread the tape as shown around tape guides and rollers.

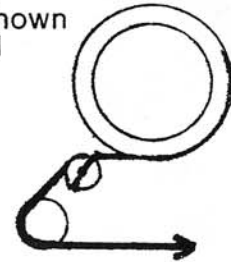


### MASKING LINES WITH THE STRAIGHTLINER-PLUS...

#### FOR STRAIGHT LINES...

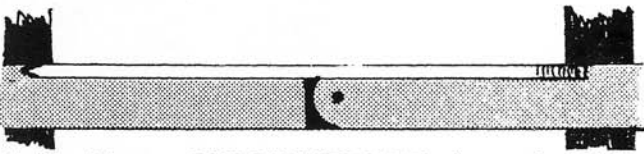

- 1) Position a STRAIGHTEDGE along the side of the frame to make sure that the frame of the STRAIGHTLINER-PLUS IS STRAIGHT.

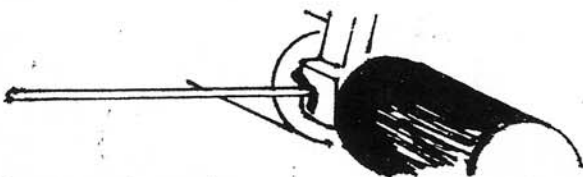


Screw pointer into the front of STRAIGHTLINER-PLUS frame and tighten wing nut.


#### FOR CURVES AND CIRCLES...



- 1) Loosen the hex set-screw on the top of the StraightLiner frame.

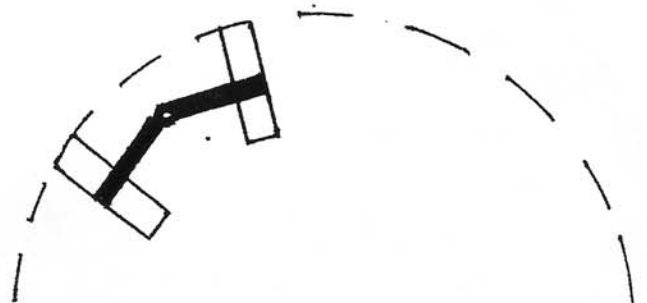

- 2) Adjust the taper of the frame by aligning the OUTER WHEELS of the StraightLiner-Plus with the INSIDE of the chalk-line.

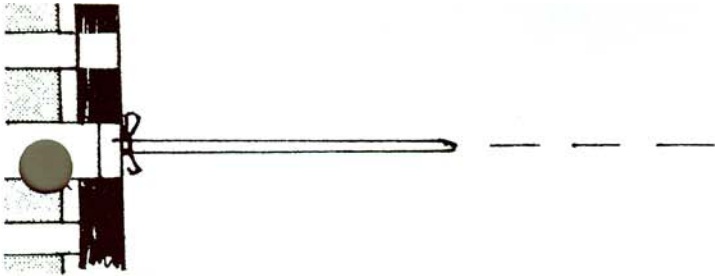


3) With the masking tape under at least the two front wheels (rollers), position the STRAIGHTLINER-PLUS so that the pointer is pointing for the center chalk line.




4) To allow a good start, begin laying masking lines roughly 2 feet from the end of the line to be masked.

3) Tighten the set screw and make a 'dry-run' without tape to make sure that the wheels track the chalkline. The pointer is not used for circles and curves.

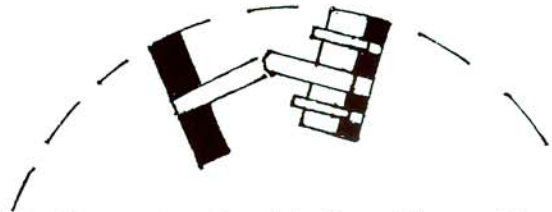


4) Position the StraightLiner-Plus with the outer wheels INSIDE the chalkline, and the masking tape under at least the front wheels.

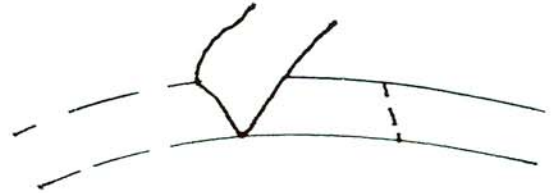

5) Lay masking lines, BUT BEFORE ENDING A CIRCLE, lift and trim off roughly two feet of the beginning of the masking tape and continue to make the complete circle.

## FINAL NOTES...

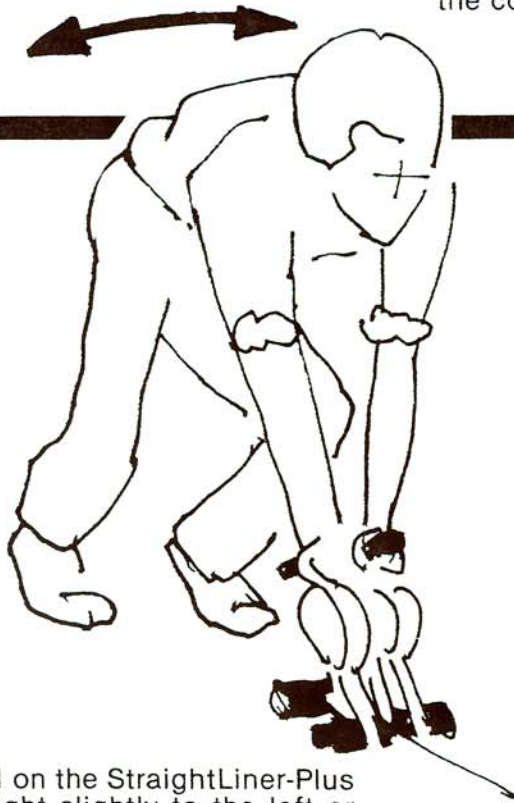

Lay lines pushing DOWN on the StraightLiner-Plus handles. Shifting body weight slightly to the left or right will compensate for straying of the unit caused by irregular court surfaces.



Douglas Industries, Inc. PO Box 407 Eldridge, IA 52748