

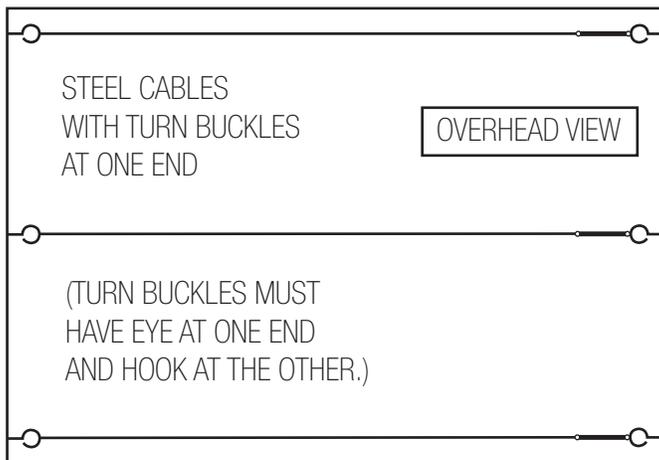
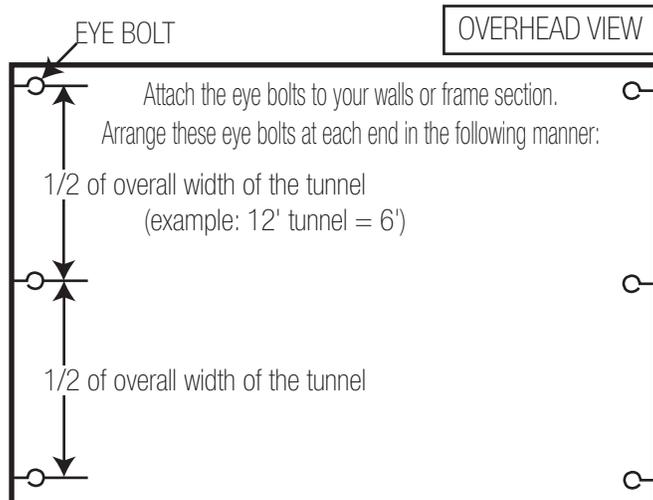


Parts List:

- (6) - Eye bolts
- (3) - 100' Cable
- (50) - Steel C Snaps
- (6) - Turnbuckles
- (12) - Cable Clamps

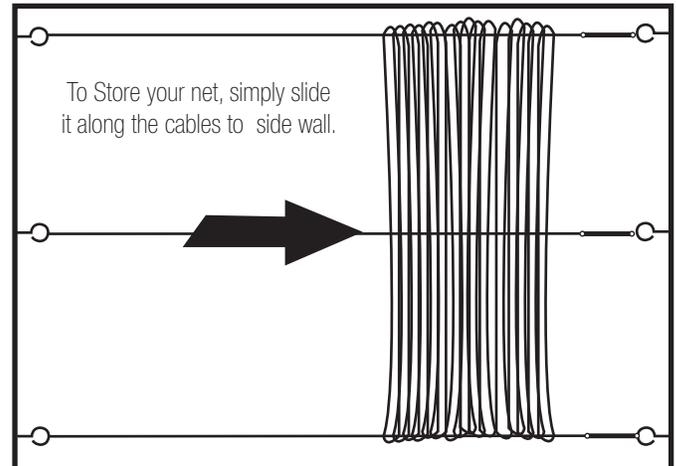

Note: The "slope" of the net is important. The center of the net, for its entire length is 12' high. The sides of the net are only 10 1/2' high, leaving 18" of net on ground to keep batted balls inside the enclosed area.

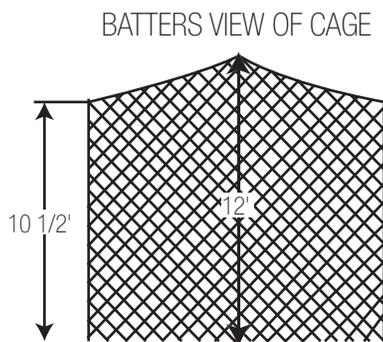

HOW TO ATTACH YOUR CABLES TO THE EYE BOLTS

1. Cut the cable to appropriate length
2. Run one end of your cable through the turnbuckle and secure using the cable clamp. Tape end of cable to prevent fraying.
3. Hook turnbuckle on to eye bolt extending from the wall or frame section.
4. Repeat steps 2 and 3 at opposite end.
5. Tighten the turnbuckles at each end of the cable to provide tension to hold up the net

NOTE: You should allow for extra cable length when setting up initially. You can always cut off excess cable if not needed

HOW TO ATTACH YOUR NETTING TO THE CABLES

1. The cables should be in place and tightened to your frame sections or walls.
2. Stretch out your net on the ground underneath the cables.
3. Starting at one end, while on the ladder or platform have your partner hand up to you the end of the net.
4. Attach the rope border on top of the net to the vertical cables by opening the snap hooks and putting the rope inside. Repeat this every 7' having your partner continue to "feed" you the net until one side is completed.
5. Repeat steps 3 and 4 for the middle and opposite side cable.

NOTE: You should only have to go up and down the ladder (3) times, once for each of the cables.

Below is an exploded view of the eye bolts, turnbuckle, cable clamp, and cable.

